

TSE 6120 FACE

Order no. 56680

Technical data:





TSE 6120 FACE

Configuration	Approvals and certification: - Compliance with all applicable EC directives - National laws must be examined separately
Power supply	12V, 3A (adapter included)
Reliable ambient conditions	Indoor use only 0 ° C / 45 ° C and 80 % rel. humidity (non-condensing)
Radio range	Up to 5 m (AES encryption)
Material	Plastic
Detection capabilities	Face detection, pincode and user-id
Verification speed	≤ 2 s
Verification rate	≥ 99 %
Error rate	≤ 0,1 %
Detection height	Depending on the mounting height 145–195 cm
Detection distance	30–80 cm
Detection angle	± 20°
Dimensions H x W x D (mounted)	175 x 140 x 150 mm
Tamper seal	Tamper switch
USB interface	Import and export of data, including updates (only with ADMIN rights)

TSE 6120 FACE

Order no. 56680

User data	<ul style="list-style-type: none"> - Number of users: 300 <ul style="list-style-type: none"> • Opening with the verification method: „Face“ - Optional: <ul style="list-style-type: none"> • Opening with the verification method: „ID + Face“ • Opening with the verification method: „ID + PINCODE“ • Opening with the verification method: „ID + PINCODE + Face“ - Deployable evaluation units (as of version 2.2): <ul style="list-style-type: none"> • TSE 6000 Cylinder • TSE 6001 Cylinder • TSE 6010 Cylinder • TSE 6020 Cylinder • TSE 6030 Cylinder • TSE 6201 CONTROL (as of version 2.0) - History function
Required products	<ul style="list-style-type: none"> - TSE FACE - TSE Control as of version 2.0 - TSE Cylinder or TSE CONTROL - TSE Software (5500, 6501, 6502) - Identification medium (optional TSE E-KEY, TSE Keypad)
Scope of delivery	<ul style="list-style-type: none"> - TSE FACE - Wall mounting including wall mounting material - Power Supply - Serial number

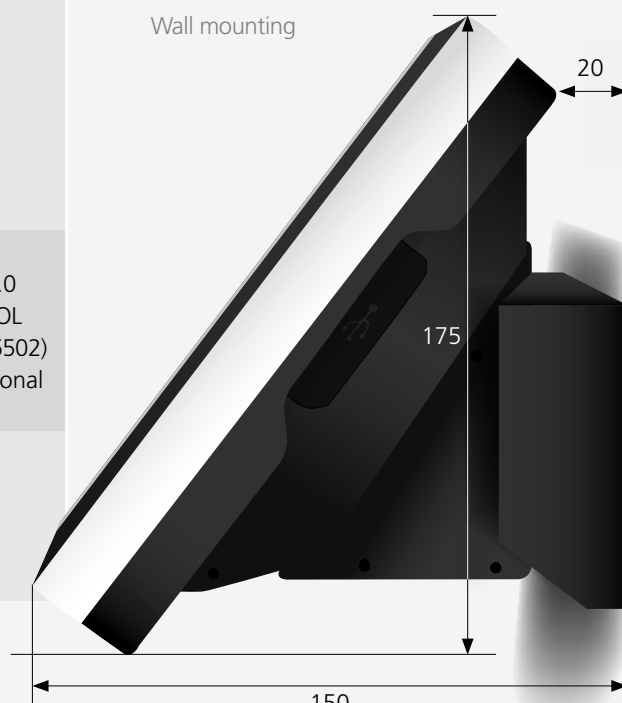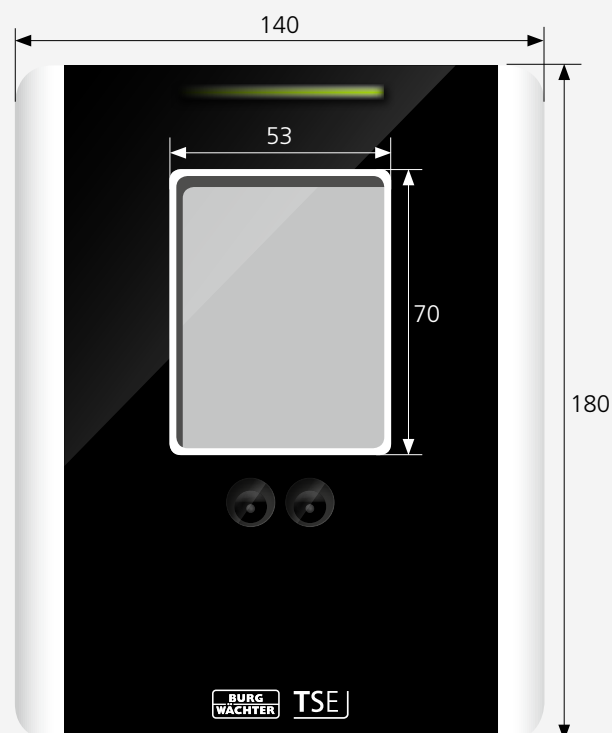

Dimensions in mm | Figure 1: 0.5

Dimensions in mm | Figure 1: 0.25

Status 02/2014